



MULTIFIT TYPE

BS STANDARD CONNECTIONS

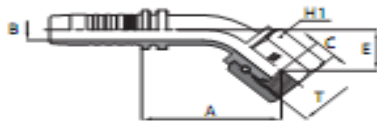

M20842


45° BSP O-RING FEMALE 60° CONE (THRUST-WIRE NUT) - BS5200 (DKOR)

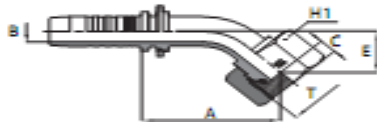

M20843

45° BSP O-RING FEMALE 60° CONE (SLIP-ON NUT) - BS5200 (DKOR)

PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	dash		T (BSP)	B	A	C	E	H1
M20843-04-04	6	1/4"	-04	1/4"-19	4,0	36,0	4,9	15,0	19	
M20843-06-06	10	3/8"	-06	3/8"-19	7,0	44,5	6,1	18,5	22	
M20843-08-08	12	1/2"	-08	1/2"-14	9,3	52,0	6,5	20,5	27	
M20842-10-10	16	5/8"	-10	5/8"-14	12,5	63,5	9,7	27,5	30	
M20842-12-12	19	3/4"	-12	3/4"-14	15,5	71,0	8,5	29,0	32	
M20842-16-16	25	1"	-16	1"-11	19,8	90,5	10,6	35,6	38	
M20842-20-20	31	1 1/4"	-20	1 1/4"-11	26,0	101,5	10,5	39,0	50	
M20842-24-24	38	1 1/2"	-24	1 1/2"-11	32,0	118,0	12,5	45,0	60	
M20842-32-32	51	2"	-32	2"-11	42,0	134,0	16,1	47,0	70	



M20882F

90° BSP O-RING FEMALE COMPACT ELBOW 60° CONE (THRUST-WIRE NUT) - BS5200 (DKOR)

PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	dash		T (BSP)	B	A	C	E	H1
M20882-04-04F	6	1/4"	-04	1/4"-19	4,0	20,0	4,9	22,0	14	19
M20882-06-06F	10	3/8"	-06	3/8"-19	7,0	23,1	6,1	27,5	19	22
M20882-08-08F	12	1/2"	-08	1/2"-14	9,3	24,9	6,5	31,1	22	27
M20882-10-10F	16	5/8"	-10	5/8"-14	12,5	24,6	9,7	32,5	24	28
M20882-12-12F	19	3/4"	-12	3/4"-14	15,0	37,5	8,5	36,0	27	32
M20882-16-16F	25	1"	-16	1"-11	20,0	51,8	10,6	44,0	36	38